



PRODUCT SPECIFICATION DATA SHEET


Stevens ASAP Fastener & Plate

General Description

All-purpose #14 blue fastener pre-assembled with a 2-inch (.051 m) gray nylon locking plate. Stevens ASAP is designed to secure Stevens membranes to steel decks (18 gauge through 26 gauge/1.3 -.55 mm), wood plank and plywood $\geq \frac{1}{2}$ inch (12.7 mm) thickness as well as minimum 2000 psi compressive strength structural concrete when an insulation board is utilized.

NOTE: Hard cover boards, i.e., gypsum and woodfiber as well as membrane installed without insulation may not allow the Stevens ASAP to seat properly. For these applications, Stevens 2-inch (.051 m) Barbed Metal Seam Plate with the Stevens #14-10 Fastener is recommended.

When used in conjunction with 76.5-inch (1.9 m) wide Stevens EP™ or Stevens Hypalon membranes on 18 gauge through 22 gauge steel decks and minimum 2000 psi structural concrete, the following ratings can be achieved: FM 1-60 at 12-in. (.305 m) on center, FM 1-90 at 6-in. (.15 m) on center and with 48-in. (1.22 m) wide Stevens EP™ membrane fastened at 18-in. (.457 m) on center, an FM 1-90 can be achieved.

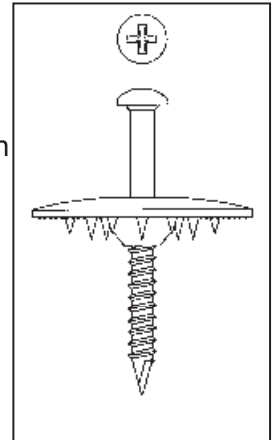

Technical Specifications

Color: Plate/Gray, Fastener/Blue

Thread Diameter: .245-in. (6.22 mm)

Head Diameter: .19-in. (4.83 mm)

Head Style: #3 Phillips Truss Head

Attachment Applications: steel, wood, structural concrete (pre-drilling required)

Coating: CR-10*

Lengths Available: 2-, 3-, 4-, 5-, 6-, 7-, 8-, 10-, 12- and 14-inches (.051, .076, .102, .127, .152, .178, .203, .254, .305, .356 m)

*CR-10 corrosion resistant coating exhibits less than 15% red rust after 30 Kesternich cycles. CR-10 coating exceeds F.M. Approval Standard 4470.

Packaging

Assembled ASAP Fastener & Plates.

Fastener Length	Pieces/Ctn	Weight/Ctn	Cartons/Skid
2-in.	500	17 lbs.	36
3-in.	500	21 lbs.	36
4-in.	450	23 lbs.	36
5-in.	400	24 lbs.	36
6-in.	350	23 lbs.	36
7-in.	300	23 lbs.	36
8-in.	300	25 lbs.	36
*10-in.	200	20 lbs.	36
*12-in.	200	24 lbs.	36
*14-in.	150	19 lbs.	36

*Limited quantity

Stevens Roofing Systems, Nine Sullivan Road, Holyoke, MA 01040 USA
 Tel: (877) 788-8324 Intntl: 1-(413) 552-1000 Fax: (413) 552-1010
 Web: stevensroofing.com Email: info@stvroof.com