



PRODUCT SPECIFICATION DATA SHEET

Stevens DeckGrip Fasteners & Plates

General Description

The Stevens DeckGrip Fastener is a blue coated #15 fastener with a modified standard thread and the ability to drill into 18 to 26 gauge metal decking. The loose fasteners are available in sizes ranging from 1.25-in. to 16-in. (.032 m to .406 m), and pre-assembled fasteners are available in sizes from 2-in. to 12-in. (.051 m to .305 m). The DeckGrip Plate is a 2-3/8 inch (.060 m) diameter Galvalume Steel seam plate featuring a unique patented "Eye Hook®" design rather than barbs in the bottom of the plate. This design enables the fastener and plate to resist high wind loads without cutting or initiating tears in the membrane.

Technical Specifications

Thread Diameter: #15

Head Diameter: .440-in. (11.2 mm)

Shank Diameter: .204-in

Head Style: #3 Phillips Recess


Attachment Applications: Steel, Wood, Structural Concrete

Drilling Capacity: 18 - 26 Gauge Metal Deck (concrete must be pre-drilled)

Coating: Blue Spex

Lengths Available: 1 1/4-, 2-, 3-, 4-, 5-, 6-, 7-, 8-, 10-, 12-, 14- and 16-inch. (.032, .051, .076, .102, .127, .152, .178, .203, .254, .305, .356, and .406 m)

Plate Size: 2 3/8-in. (.060 m), round 20-gauge Galvalume, with eye hook design.

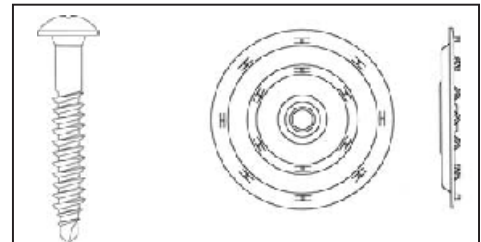

Packaging:

Loose Plates & Screws:

Fastener Length	Fasteners/Bucket	Weight/Bucket	Buckets/Skid
1 1/4-in.	1,000	12 lbs.	60
2-in.	1,000	19 lbs.	60
3-in.	1,000	29 lbs.	60
4-in.	1,000	38 lbs.	60
5-in.	1,000	47 lbs.	40
6-in.	500	29 lbs.	60
7-in.	500	33 lbs.	60
8-in.	500	38 lbs.	60
*10-in.	500	47 lbs.	15
*12-in.	500	56 lbs.	15
**14-in.	500	65 lbs.	15
**16-in.	250	38 lbs.	15

Plate Size	Plates/Box	Weight/Box	Boxes/Skid
2 3/8-in.	1000	49 lbs.	24

Pre-Assembled DeckGrip Fasteners:

Fastener Length	Fasteners/Box	Weight/Box	Box/Skid
2-in.	500	41 lbs.	30
3-in.	500	46 lbs.	30
4-in.	250	25 lbs.	30
5-in.	250	28 lbs.	45
6-in.	250	27 lbs.	45
7-in.	250	32 lbs.	30
8-in.	250	35 lbs.	30
*10-in.	125	19 lbs.	30
*12-in.	125	22 lbs.	30

*Limited Quantity

**Special order