




PRODUCT SPECIFICATION DATA SHEET

Stevens #12 Insulation Fasteners & Hex Plates

General Description

The Stevens #12 insulation fastener in combination with Stevens 2-7/8-in. (.071 m) hex shaped Galvalume coated steel insulation plate is designed for the mechanical attachment of Stevens approved insulation board to the roof deck. Stevens #12 insulation fasteners are Factory Mutual Approved and may be used with Stevens 2-7/8-in. (.071 m) hex metal insulation plates as specified in the Stevens Roofing Systems listing in the current edition of the *Factory Mutual Research Approval Guide* for Stevens #12 insulation fasteners and Stevens 2-7/8-in. (.071 m) hex metal insulation plates.

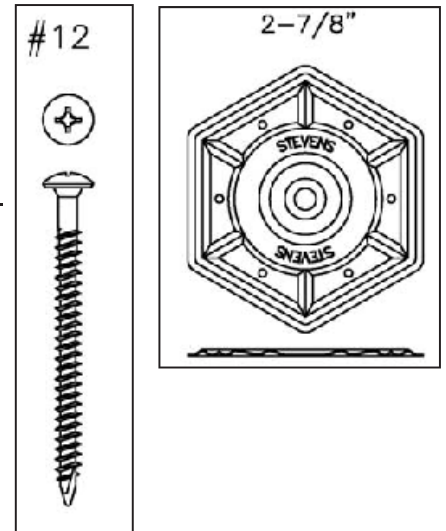

Technical Specifications

Color: Black

Thread Diameter: .222-in. (5.639 mm)

Shank Diameter: .167-in.

Head Diameter: .448-in. (11.379 mm)

Head Style: #3 Phillips

Attachment Application: steel (18 to 26 gauge/1.3 - .55 mm), wood

Coating: Sentri*

Plate Material: Galvalume

Lengths Available: 1-5/8-, 2 1/4-, 2 7/8-, 3 1/4-, 3 3/4-, 4 1/2-, 5-, 6-, 7- and 8-inch (.041, .057, .071, .083, .095, .114, .127, .152, .178, .203 m).

*The Senti coating exceeds F.M. Approval Standard 4470.

Packaging

Fast. Length	Thread Length	Fast./Bucket	Weight/Bucket	Bucket/Skid
1 5/8-in.	Full	1,000	12 lbs.	64
2 1/4-in.	1 7/8-in.	1,000	16 lbs.	64
2 7/8-in.	2 1/2-in.	1,000	20 lbs.	64
3 1/4-in.	3-in.	1,000	22 lbs.	64
3 3/4-in.	3-in.	1,000	26 lbs.	64
4 1/2-in.	4-in.	1,000	30 lbs.	64
5-in.	4-in.	1,000	34 lbs.	48
6-in.	4-in.	1,000	40 lbs.	48
7-in.	4-in.	500	23 lbs.	64
8-in.	4-in.	500	26 lbs.	64
2 7/8-in. Plates		1000	49 lbs.	32

Stevens Roofing Systems, Nine Sullivan Road, Holyoke, MA 01040 USA
 Tel: (877) 788-8324 Intntl: 1-(413) 552-1000 Fax: (413) 552-1010
 Web: stevensroofing.com Email: info@stvroof.com