




PRODUCT SPECIFICATION DATA SHEET

Stevens DeckGrip® Reel-Fast Plate

General Description

Stevens DeckGrip Reel Fast plates are designed for use with DeckGrip fasteners in mechanically fastened Stevens EP™ and Stevens EV™ systems. The plates are collated on a reel, either 12-in or 6-in (.305 m or .150 m) O.C., using 2-mil polyethylene film as a banding. DeckGrip Reel Fast parts carry the same FMG uplift approvals as the standard DeckGrip plate. Time studies have shown that DeckGrip Reel-Fast parts can increase seam fastening productivity by 30-50% when compared to traditional methods.

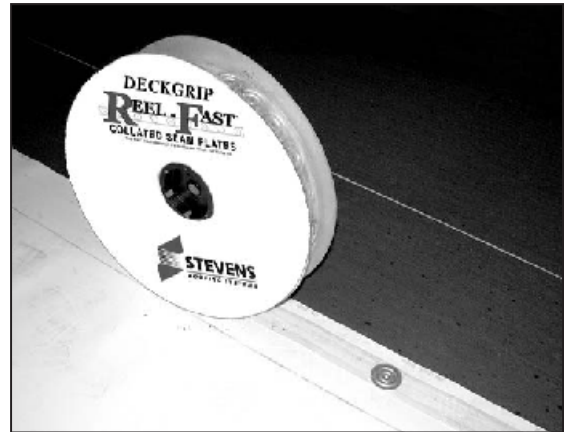

Installation

Fasten the first plate at the approved location on the membrane (refer to Stevens Roofing Systems Detail SR-600 Lap Seam Cross Sections) with the appropriate length DeckGrip fastener and roll out the reel down the length of the sheet. The plates are ready to be secured. If the plates begin to run off the top flutes or are not positioned properly within the membrane lap, you can adjust the position of the plate to where it should be and the remaining plates shall fall in position. For complete installation recommendations, refer to our literature titled: "Stevens Reel-Fast Installation Tips and Best Practices" found on our website www.stevensroofing.com

Technical Specifications

2-3/8-in. (.060 m), round 20 gauge Galvalume, with eye-hook* design.

Packaging & Storage

Part No.	Description	Pieces/Reel	Weight/Reel
2087131	2-3/8-in./0.060 m DeckGripSeam Plates 12-in.(.305 m) o.c.	500 pcs/reel*	25 lbs. (11kg)/reel
2087138	2-3/8-in./0.060 m DeckGrip Seam Plates 6-in. (.150 m) o.c.	500 pcs/reel*	25 lbs. (11kg)/reel

*Product is packaged 2 reels per box; 20 boxes per pallet.

*Eyehook is trademark of ITW Buildex

Stevens Roofing Systems, Nine Sullivan Road, Holyoke, MA 01040 USA
 Tel: (877) 788-8324 Intntl: 1-(413) 552-1000 Fax: (413) 552-1010
 Web: stevensroofing.com Email: info@stvroof.com